

Tactiles


Ground surface Indicators for the orientation of people with vision impairment

Overview


Vision impaired pedestrians are subject to a wide range of possible dangers and inconveniences. Comcork Tactiles are a special flooring tile with a very significant raised profile, designed to provide the vision impaired with warning of impending hazards or give directional guidance.

Comcork Tactiles are ideally suited for:

- Stairways, landings, escalators and ramps
- Pram crossings, pedestrian refuges, kerbs and footpaths
- Bus stops, railway and ferry platforms
- All areas as required by the building code of Australia and as detailed in AS/NZ 1428.4.

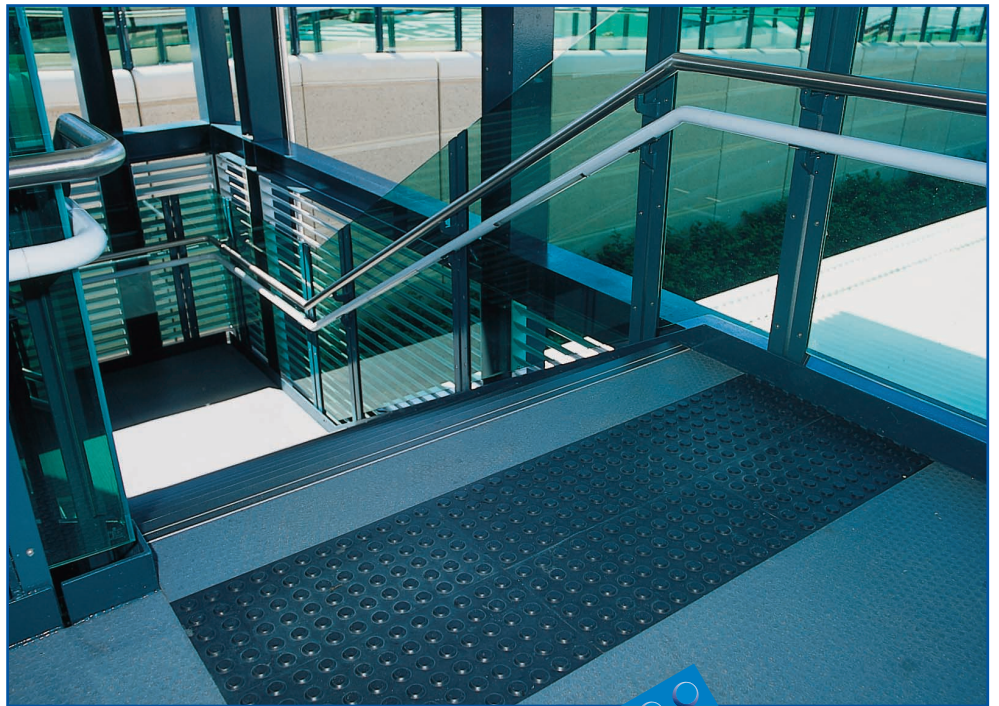

*Warning of Hazard Indicator
Large raised stud pattern.*

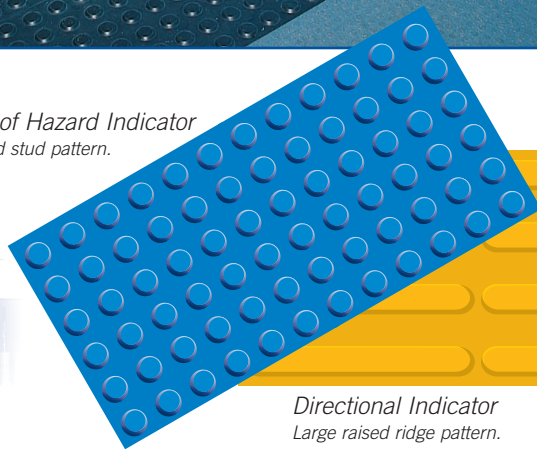

*Directional Indicator
Large raised ridge pattern.*



Comcork Flooring

AUSTRALIAN
MADE
AUSTRALIAN
OWNED

FLEXIBLE, ANTI-SLIP, HEAVY DUTY SURFACE MOUNTED OR INLAID GROUND SURFACE INDICATORS.

Tactiles

Ground surface Indicators
for the orientation of people
with vision impairment.

A special flooring tile with a significantly raised profile designed to provide the vision impaired with warning of impending hazard or give directional guidance.

MATERIAL DESCRIPTION

Made from unique cork and specially formulated synthetic rubber composition. Tactiles are quite, highly durable and provide excellent, anti-slip in both wet and dry conditions.

SPECIAL FEATURES


1. Proven use in harsh Australian conditions.
2. Can be easily installed directly **onto** and **over** existing surfaces, including concrete, bitumen, aluminium, steel and compressed sheet.
3. Highly durable and able to withstand heavy pedestrian traffic in demanding conditions because of Comcork's ability to absorb force at the point of contact.
4. Comcork Tactiles provide excellent anti-slip in both wet and dry conditions (R11 slip resistance). Both cork and rubber have naturally high frictional properties.
5. Comcork Tactiles are able to follow the ground surface contours and gradients.
6. Can be easily scribed to fit angled finishes.
7. Will not chip, fracture or crack with substraight movement.
8. Proven performance in both internal and external use (dry and wet) in demanding Australian conditions.
9. Comcork Tactiles have high luminance contrast and are available in six colours to allow for a 30% variance in luminance as required by AS/NZS 1428.4.
10. Exceptional wear resistance and durability.

Ask for a copy of our detailed guide for the use of Comcork Flooring Tactiles in the most common applications.

AVAILABLE FROM:



For details on
how to install
Tactiles ... ask
for our brochure!

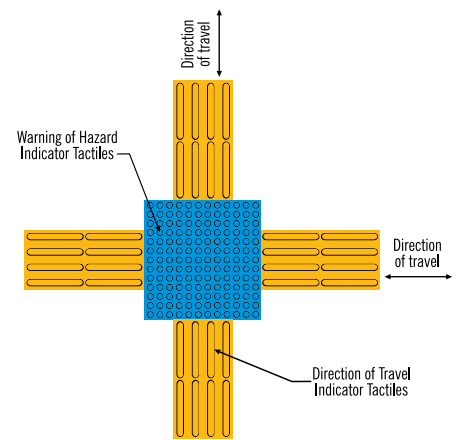

TECHNICAL SPECIFICATIONS:

Dimensions: Tile size: 300 x 600mm

| | | |
|------------------------|------------------|-----------------------------|
| Specifications: | Base thickness: | 2.5mm |
| | Profile height: | 5.0mm |
| | Total thickness: | 7.5mm |
| | Edges: | Straight edges on all sides |

Composition: Made from unique cork and rubber composition. The Tactiles are easily fitted, highly durable and provide excellent anti-slip in both wet and dry conditions.

Types: Two types are available:

- Warning of Hazard Indicator (large round studded pattern).
- Direction of Travel Indicator (large ridge pattern).

Luminance and Range of Colours: Available in a range of standard colours in both Hazard and Directional profiles to allow necessary contrast and provide design flexibility. Special colours on request.

| | |
|--------------------------------------|------------------------------------|
| Ivory 52 cd/m ² | Terracotta 15.5 cd/m ² |
| Safety Yellow 44.2 cd/m ² | Pacific Blue 9.8 cd/m ² |
| Saxon Grey 22.7 cd/m ² | Black 6.6 cd/m ² |

Slip Resistance: Comcork Flooring Tactiles provides excellent anti-slip in both wet and dry conditions. Tested to AS/NZS 4586 Slip Resistance of Pedestrian Surfaces.

Chemical Resistance: Comcork Flooring Tactiles are resistant to most common acids, alkalis, oils and greases.

Installation: Must be in accordance with AS 1884 and conform with the recommended Comcork Flooring Installation Instructions.

Warranty: Comcork Flooring warrants its flooring within the terms of Comcork's standard warranty, against specific suitable installations, when installed correctly and in accordance with the Comcork Flooring installation instructions.

Consult your distributor for specific details regarding the above areas.

7-15 Valley Street, Oakleigh South, Victoria 3167 Australia.
Telephone 613 9544 2288 Facsimile 613 9562 8883
www.comcork.com.au acl_comcork@acl.com.au

Manufactured by ACL Comcork. Division of Automotive Components Limited. A.B.N. 51 006 542 785



FLEXIBLE, ANTI-SLIP, HEAVY DUTY SURFACE MOUNTED OR INLAID GROUND SURFACE INDICATORS.